

# The experimental study of the KrF excimer laser ASE pulse compression by the way of quenching method

Pengyuan Du, Dianyng Lin, Zhiwei Lu

National Key Laboratory of Tunable Laser Technology,  
Harbin Institute of Technology, Harbin, 150080, China

Поступила в редакцию 28.03.2013 г.

The ASE (Amplified Spontaneous Emission) pulses, output of the transversely excited atmosphere pumped KrF excimer laser, was compressed experimental by the way of laser oscillation quenching. The effect of mirror position and diaphragm aperture on the pulses compression is discussed in this paper. The experimental results show that, when the angle of the mirror relative to the optical axis is 3.0 mrad and the diaphragm aperture is 4.0 mm, the pulse compression effect is best, and the ideal waveform can be obtain. For the original 12.5 ns pulse, output of the discharge pumped KrF excimer laser, when using the way of laser oscillation quenching to compressed, it can be got the best results of 5.1 ns.

*Key words:* excimer laser, pulse compression, laser oscillation quenching, ICF.

## Introduction

For the short wavelength, high efficiency and well spatial uniformity, the KrF excimer laser has a good prospect in Inertial Confinement Fusion (ICF), and plasma physics research areas. It is one of the main candidates for the light source of the ICF drive [1, 2]. The imperfect of KrF excimer laser pulse compression technology is the main factor to limit its application, so the KrF laser nanosecond pulse compression is currently a hot research topic [3–5]. The methods of KrF laser pulse compression usually are combined SRS (Stimulated Raman Scattering) and SBS (Stimulated Brillouin Scattering) [6], combined SRS and fast Pockels cell [7], the same frequency pulse amplification [8], SRS [9], the plasma switch method [10] and others. These above methods of the ASE pulse compression research have important reference values. However, the ASE pulses outputting from the KrF excimer laser have evident advantages in the spatial energy distribution, incoherent and natural bandwidth than the laser pulses [11, 12]. To our knowledge, they have many potential applications in the ICF studies. ASE pulse output for KrF excimer laser is used for pulse compression research quenching in this paper. This method can achieve shorter ASE pulse. It is also a method to achieve ASE pulse compression.

## 1. Theoretical analysis

When removing the mirrors of the resonant cavity, the oscillation can not forming. The spontaneous emission radiation pulses are amplified by the process of the stimulated emission radiation. The output light is the amplified spontaneous emission (ASE).

The amplification transmission of the nanosecond light pulses can be described as following [13]

$$\frac{\partial g(x, y, z, t)}{\partial t} = -g(x, y, z, t) \frac{I(x, y, z, t)}{J_s}; \quad (1)$$

$$\frac{dI(x, y, z, t)}{dz} = [g(x, y, z, t) - \alpha]I(x, y, z, t) - \gamma I^2(x, y, z, t); \quad (2)$$

$$g(x, y, z, v, t) = n^*(x, y, z, t)\sigma(v). \quad (3)$$

Where  $I$  is the intensity of the light;  $g(x, y, z, t)$  is the gain coefficient of the working medium;  $\alpha$ ,  $\gamma$  are the related constants;  $n^*(x, y, z, t)$  population inversion density;  $\sigma(v)$  the stimulated emission cross section.

The principle of the timeshare quenching method to compress the ASE pulses can be described as follow. In the amplifier, the Reversal particles were consumed by the amplification of the ASE pulses. So the gain was reduced. In the process of the aimed ASE pulses (the output compressed ASE pulses) transmission amplification, a few injected ASE pulses (come from its own amplifier or other amplifier) were employed to increase the consumption of the Reversal particle number. In the period of the pulse overlap, the gain rapid decrease, and the amplification of the aimed ASE pulses were suppressed so that the pulses compression were obtained.

For shorter the compressed ASE pulse width and higher stability, It required to control the relative delay and the injected pulse energy. The smaller relative delay, the shorter the rising edge of the pulse waveform. The energy of the injected ASE pulse is inversely proportional to the fall time of the output ASE pulse. If the above two conditions are satisfied

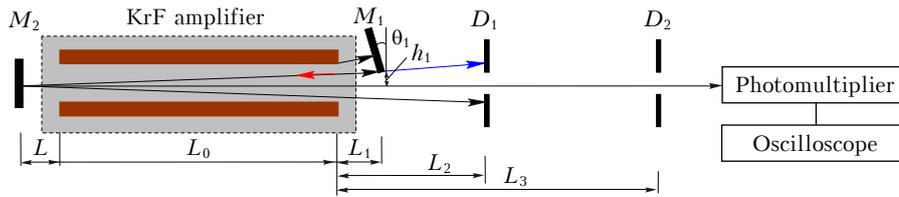


Fig. 1. The experimental schematic

in the same time, the width of the compressed ASE pulse will shorter.

## 2. Setup of the experiment

The experimental setup is shown in Figure 1.  $M_1$  and  $M_2$  are the totally reflecting mirrors;  $\theta$  is the adjusting deviation angle of  $M_1$ ;  $h$  is the distances between  $M_1$  and the main optical axis. Removing the front mirror of the excimer laser, the ASE pulses output. Part of the ASE pulses reflected by the  $M_1$ , oscillate severally between the back mirror and  $M_1$ , consume a lot of inversion population. It suppresses the successor part of the gains, and compressed the ASE pulse. The diaphragms are spatial filter. The photomultiplier is used to receive the compressed ASE pulses. The waveform data are collected by the oscilloscope.

The main factors to effect the pulse compression are  $\theta$  and the apertures  $r_1$ ,  $r_2$ .

## 3. Experimental results and analysis

Before the ASE pulse compression in experiment, the reflecting mirror of the laser resonant cavity is

removed. The ASE pulse waveform before compression is shown in Figure 2. Its rising time is 5.86 ns, and the pulse width is 12.5 ns.

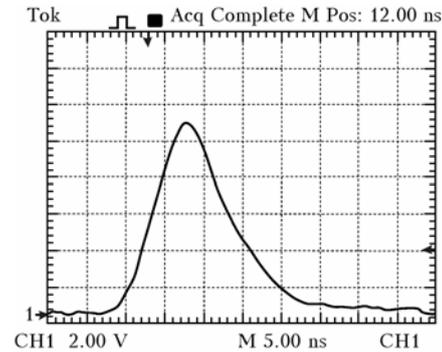


Fig. 2. Waveform before compression

### 3.1. Influence of $\theta$ on the pulse compression

When  $r_1 = 4.0$  mm,  $r_2 = 4.0$  mm, the range of  $\theta$  is from 2.0 to 5.0 mrad, the outputs of the ASE pulse are shown in Figure 3 are respectively corresponded to 2.0, 3.0, 4.0, and 5.0 mrad of  $\theta$ . The corresponded pulse widths are 5.3, 5.0, 5.2, and 6.4 ns. When

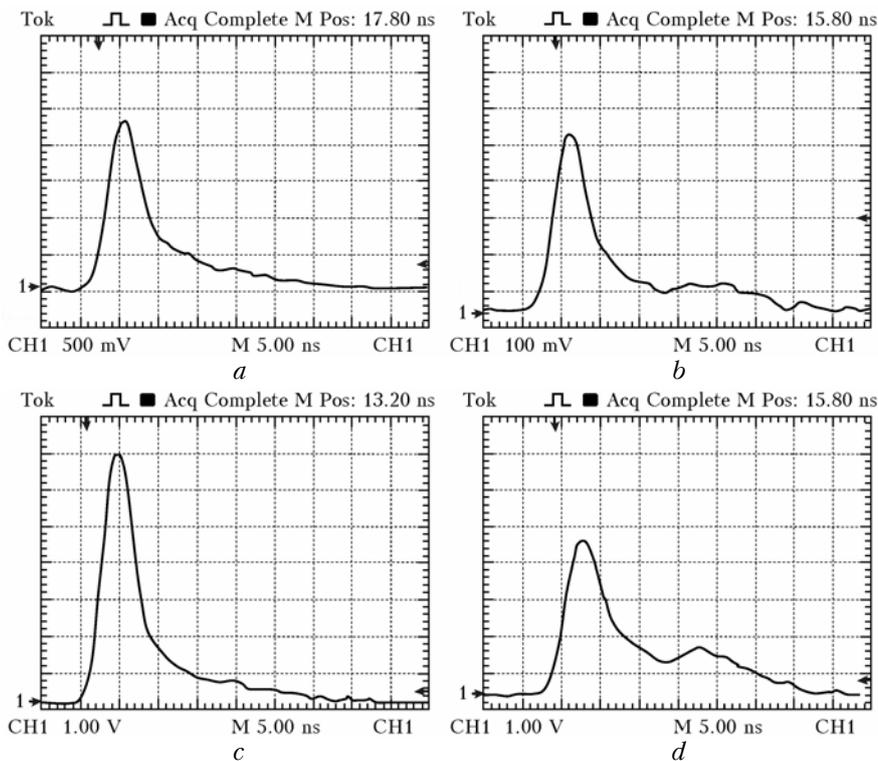


Fig. 3. The ASE pulse waveform  $\theta$  for different values of pulse compression

$\theta = 3.0$  mrad, the compression effect is best, the pulse width is most narrow, the falling edge of the waveform is more precipitous.

When  $\theta$  is small, the direction of propagation of the pulse reflected by  $M_1$  is smaller than deflected main optical axis. It is difficult to completely filter by the diaphragm so that the width of ASE pulse was broadened. When  $\theta$  is large, the pulse reflected by  $M_1$  oscillated less in power chamber. Quenching is not completed; finally the falling edge of ASE pulse is relatively slowly. Based on the above,  $\theta = 3.0$  mrad is selected.

### 3.2. Influence of $r_1$ on the pulse compression

When  $\theta = 4.0$  mrad,  $r_2 = 4.0$  mm, the compressed ASE pulses with different  $r_1$  are shown in Figure 4, *a-d* are respectively corresponded to 2.0, 4.0, 6.0, 8.0, and 10.0 mm of  $r_1$ . The corresponded pulse widths are 5.0, 5.0, 5.3, 5.2 and 10.5 ns.

The increase of  $r_1$  increases the proportion of stray light, broadening the ASE pulse width. When the  $r_1$  is large enough, bimodal of ASE pulse waveform appears. When the  $r_1$  decreases, energy of the ASE pulse decreases. The spot shape, energy and pulse width have a significant impact by the diaphragm 1. Based on the above,  $r_1 = 4.0$  mm is selected.

### 3.3. Influence of $r_2$ on the pulse compression

When  $\theta = 3.0$  mrad,  $r_1 = 10.0$  mm, the influence of  $r_2$  size on pulse compression is analyzed. The proportion of the stray light changing with the size of  $r_2$  is shown in Figure 5.

When  $\theta = 3.0$  mrad,  $r_1 = 10.0$  mm, the influence of  $r_2$  size on pulse compression is analyzed. The proportion of the stray light changing with the size of  $r_2$  is shown in Figure 5. The first peak is noted as  $A_1$ . The second peak is noted as  $A_2$ . The proportion of the stray light changing with the size of  $r_2$  is shown in Table 1.

Table 1

Analysis of stray light

$r_2$ , mm	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
$A_2/A_1$	0.38	0.47	0.59	0.66	0.73	0.77	0.80	0.84

The increased  $r_2$  increases the proportion of the stray light, and deteriorated the waveform of the ASE pulse. The decreased  $r_2$  is benefit to obtain well compressed ASE pulse. Taking into account the energy of the compressed ASE pulse,  $r_2 = 6.0$  mm is selected.

Considering the energy, pulse width and waveform of the compressed ASE pulses, the related

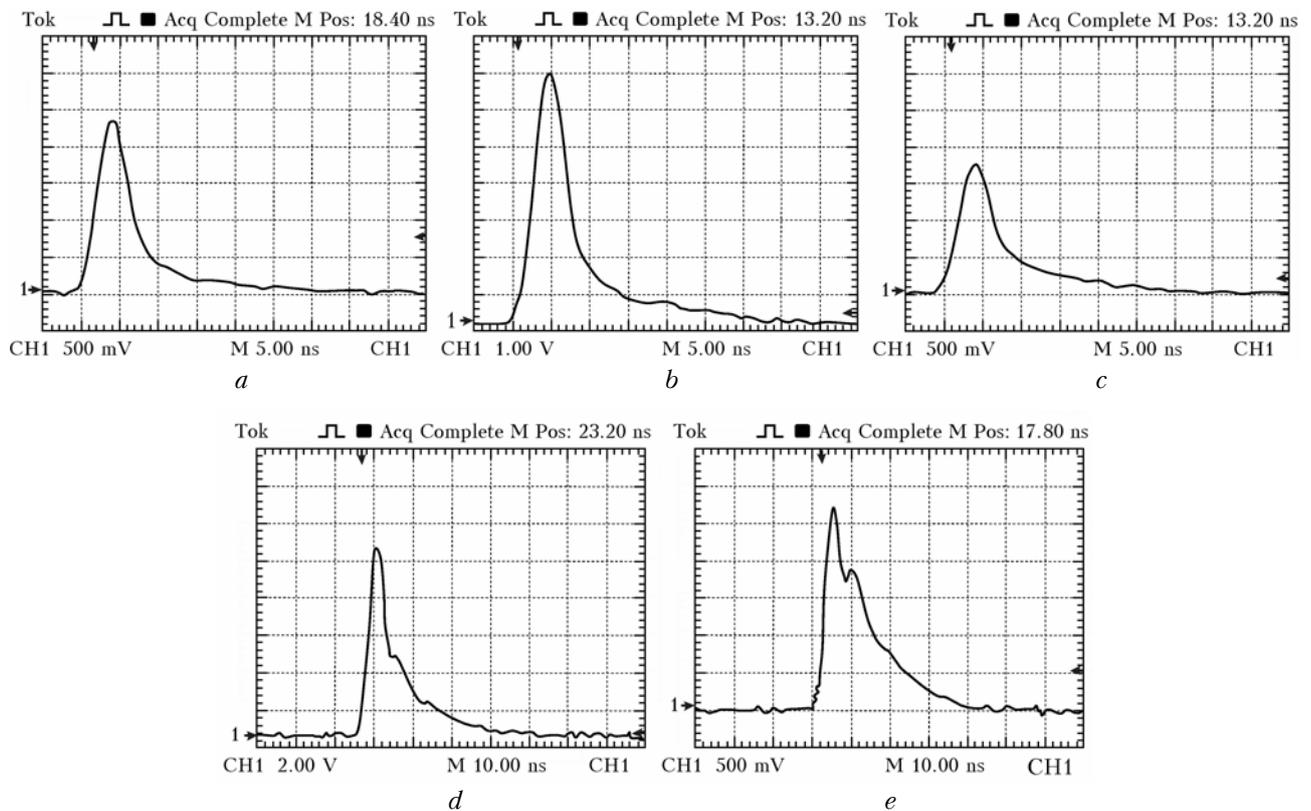


Fig. 4. The ASE pulse waveform  $r_1$  for different values of pulse compression

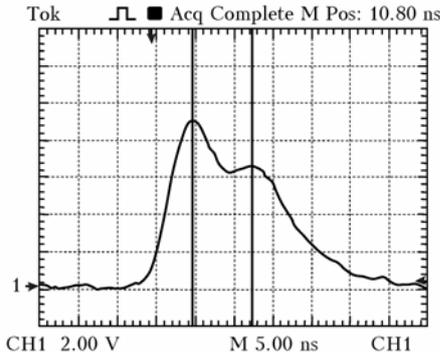


Fig. 5. The compressed ASE pulse waveform

parameters are selected as follows:  $\theta = 3.0$  mrad,  $r_1 = 4.0$  mm,  $r_2 = 6.0$  mm,  $L_0 = 732.2$  mm,  $L_1 = 362.0$  mm,  $h = 1.0$  mm,  $L_2 = 549.2$  mm,  $L_3 = 1353.8$  mm, and  $L = 25.0$  mm. The output ASE pulse is shown in Figure 6. A 5.1 ns of pulse was obtained.

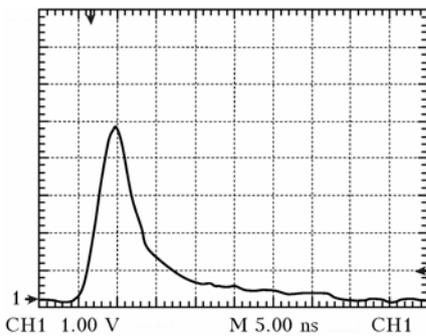


Fig. 6. The compressed ASE pulse waveform

### Conclusion

The method of time-sharing quenching was proposed to compress the KrF excimer amplifier ASE pulses in this paper. Short pulses of 5.1 ns were obtained from the 12.5 ns oscillator output. The experimental results show that it can be effectively compressed the ASE pulse. This is a simple and effective method to extend to the other UV preionization discharge pumped gas laser.

1. Partanen J.P., Shaw M.J. High-power forward Raman amplifiers employing low-pressure gases in light guides. I. Theory and application // *J. Opt. Soc. Amer. B.* 1986. V. 3. P. 1374–1386.
2. Preston S.G., Blyth W.J., Zepf K.M.W. et al. Feasibility studies of the optically-ionized recombination XUV laser schemes on the Spite KrF CPA laser system // Central Laser Facility (CLF), Rutherford Appleton Laboratory (RAL) Annual Report. 1994. V. 95. P. 38–39.
3. Obenschain S.P., Bodner S.E., Colombant D. et al. The NIKE KrF laser facility: Performance and initial target experiments // *Phys. Plasmas.* 1996. V. 3. P. 2098–2107.
4. Owadano Y., Okuda I., Matsumoto Y. et al. Performance of the ASHURA KrF laser and its upgrading plan // *Laser and Particle Beams.* 1993. V. 11. P. 347–351.
5. Sethian J.D., Friedman M., Giuliani J.L., Lehmborg R.H., Obenschain S.P., Kepple P. Development of electron beam pumped KrF lasers for fusion energy // *Phys. Plasmas.* 2003. V. 10. P. 2142–2146.
6. Eiichi Takahashi, Losev L.L., Yuji Matsumoto, Isao Okuda, Isao Matsushima, Susumu Kato, Hirotaka Nakamura, Kenji Kuwahara, Yoshiro Owadano. KrF laser picosecond pulse source by stimulated scattering processes // *Opt. Commun.* 2003. V. 215. P. 163–167.
7. Eiichi Takahashi, Losev L.L., Yuji Matsumoto, Isao Okuda, Susumu Kato, Tatsuya Aota, Yoshiro Owadano. 1 ps, 3 mJ KrF laser pulses generated using stimulated Raman scattering and fast Pockels cell // *Opt. Commun.* 2005. V. 247. P. 149–152.
8. Szatmari S., Schafer F.P. Simplified laser system for the generation of 60 fs pulses at 248 nm // *Opt. Commun.* 1988. V. 68. P. 196–202.
9. Christov C.G., Tomov I.V., Chaltakov I.V. Shorting of excimer laser pulses with saturable absorbers // *Opt. Commun.* 1984. V. 52. P. 211–214.
10. Li H.X., Lou Q.H., Ye Z.H. et al. Research on evaluating norm of excimer laser beam uniformity // *High Power Laser and Particle Beams.* 2004. V. 16. P. 729–732.
11. Allen L., Peters G.I. Amplified spontaneous emission III. Intensity and saturation // *J. Phys. A. Gen. Phys.* 1971. V. 4. P. 564–573.
12. Peters G.I., Allen L. Amplified spontaneous emission. IV. Beam divergence and spatial coherence // *J. Phys. A. Gen. Phys.* 1972. V. 5. P. 546–554.
13. Hariri S. Sarikhani. Theoretical application of  $z$ -dependent gain coefficient to describe amplified spontaneous emission // *Opt. Lett.* 2012. V. 37. P. 1127–1129.